3.6 TON FOUR POST PARKING LIFT

NITROK®



4P36PL-F

FEATURES

- Suitable for residential areas, large parking lots, commercial centers & for private house parking
- Four column support, single phase power supply, hydraulic cylinder lifting with a specially balancing device designed to ensure a smooth operation
- Functional design for convenient access and obstruction-free door opening
- 3600kg car capacity with safety anti-fall device that will automatically engage to ensure the safety of the car and the operator if the lifting chain fails
- Space saving
- Low requirements on civil engineering
- Tested extensively for quality and reliability


PRODUCT CONFIGURATION


- Manual unlock device to ensure a smooth and safe operation
- Anti-fall device to prevent any abnormal crash and ensure th vehicle safety
- Isolation plate set between the platforms to stop oil and mud falling to the lower parked vehicle

SPECIFICATIONS

MODEL	NITROK 4P36PL-F
LIFTING CAPACITY	3600 kg
OPERATING MODE	PUSH BUTTON SWITCH
OVERALL DIMENSIONS (L x W x H)	5752 x 2845 x 2280 mm
SUITABLE VEHICLE DIMENSIONS	5000 x 1820 x 1550 mm
LIFTING SPEED	2.12 m/min
MAX STORAGE / RETRIEVAL TIME	36s
POWER SUPPLY	AC 220V / 50Hz
MOTOR POWER	2.2 KW

TECHNICAL DRAWING

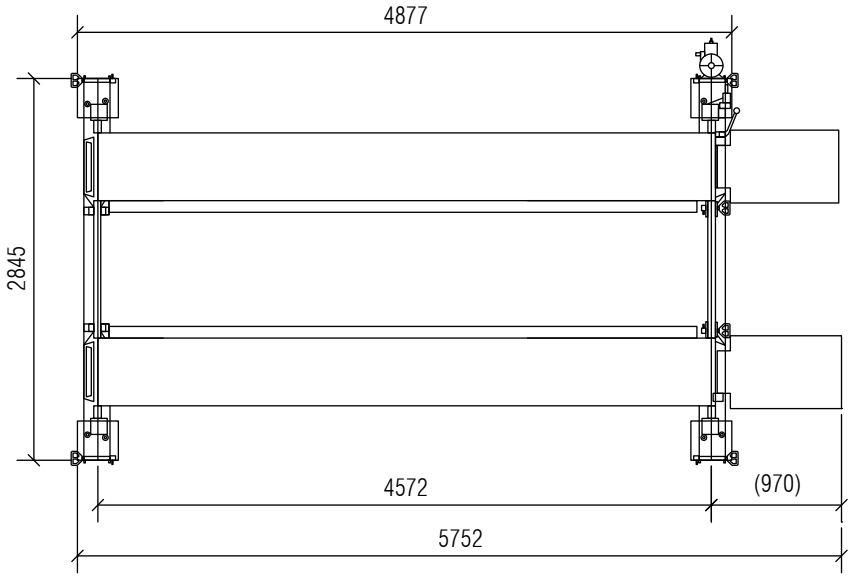

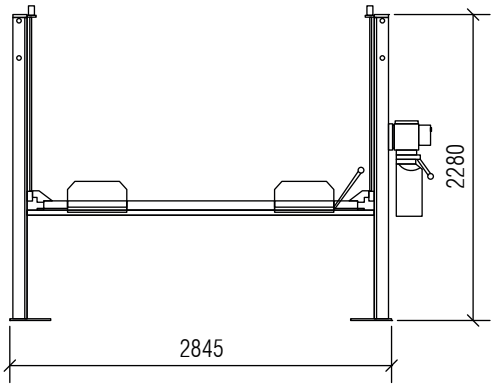

info@sedana.com
www.sedana.com

سيدانا
SEDANA

DUBAI SHARJAH ABU DHABI
BEIRUT HAMRIYAH FUJAIRAH